

Web page:
www.sailorstailor.com
www.beanbagcity.com




The Sailors' Tailor, Inc.[®]
Robert Rowland

Email: sandy@beanbag.com

1480 W Spring Valley-Paintersville Rd
Spring Valley, Ohio 45370

Tel: (937) 862-7781
Fax: (937) 862-7701


C-250 Boat Cover Measuring Diagram
Please set your fax to "photo" or "fine"
Fax to: 916/943-1973

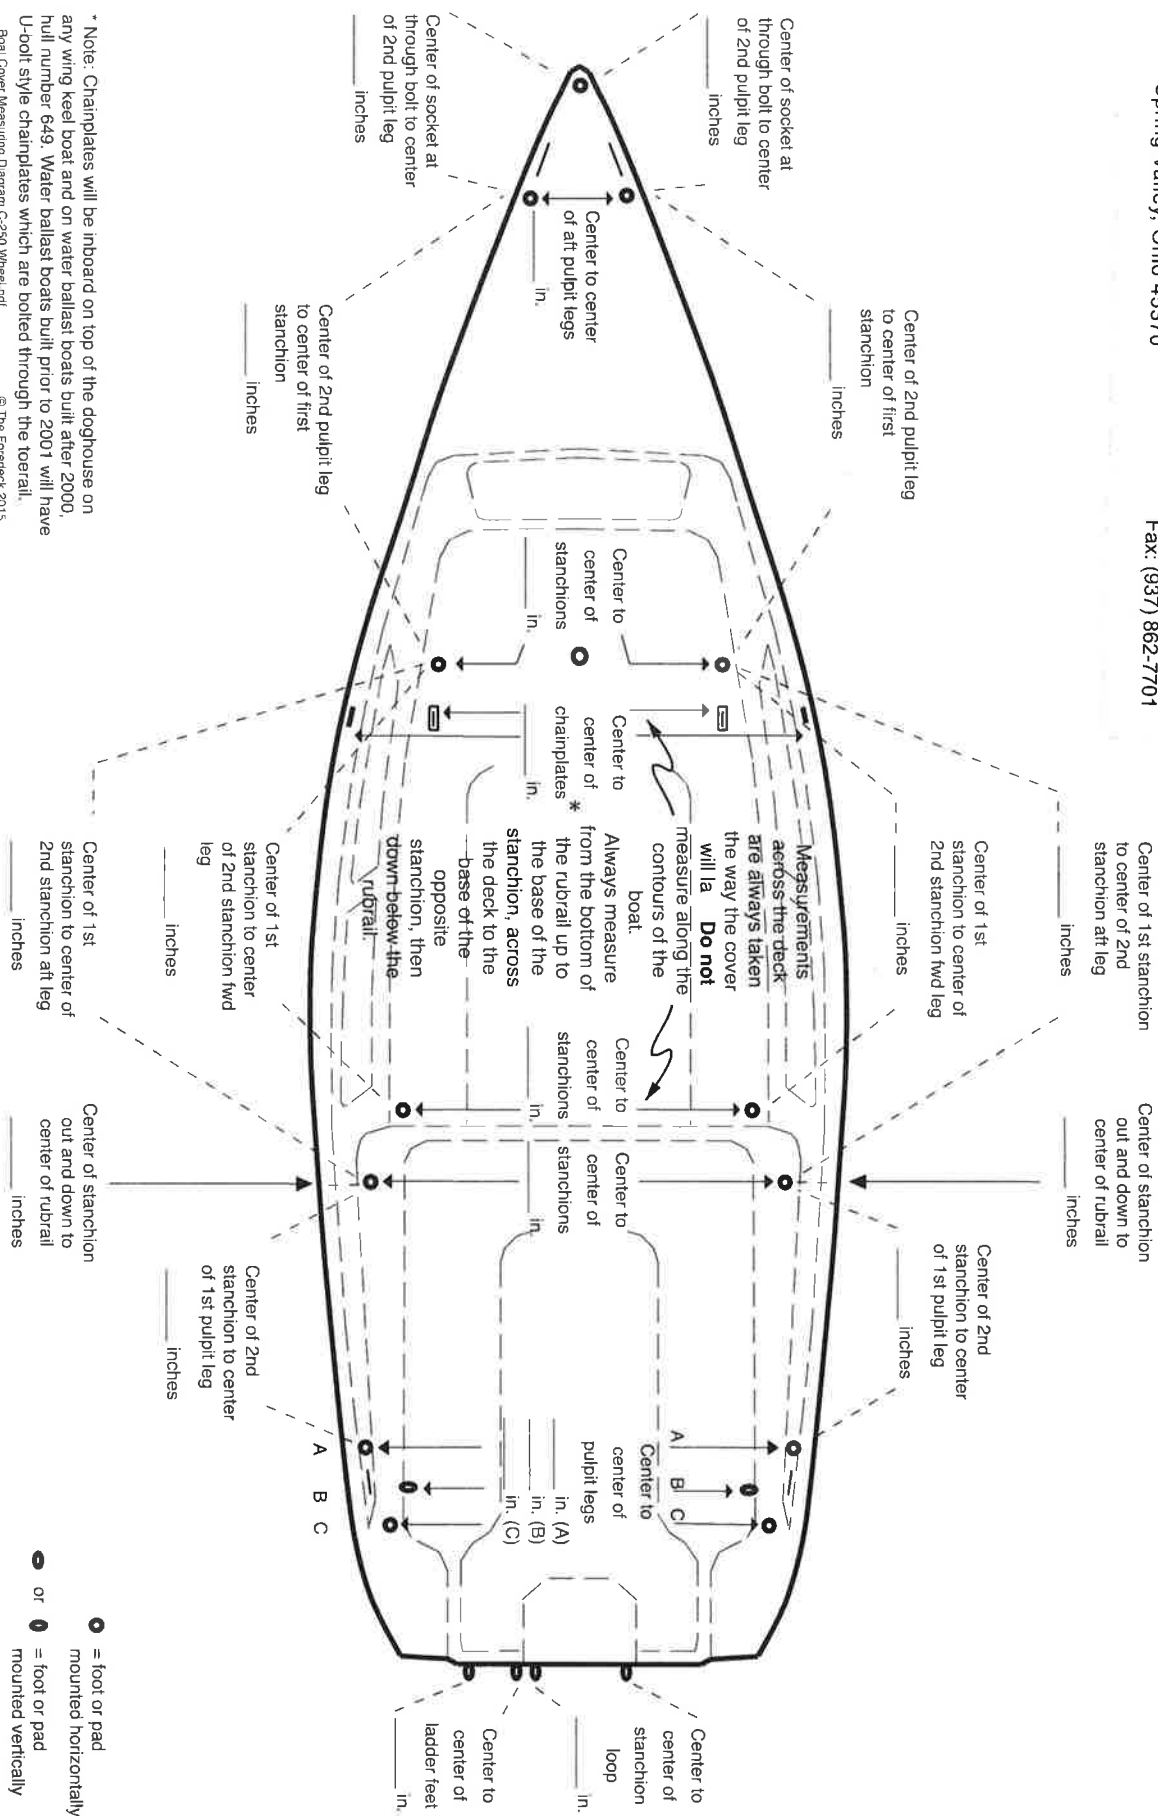

* Note: Champplates will be inboard on top of the doghouse on any wing keel boat and on water ballast boats built after 2000, hull number 649. Water ballast boats built prior to 2001 will have U-boat style champplates which are bolted through the torail.

© The Foredeck 2015

CT 250

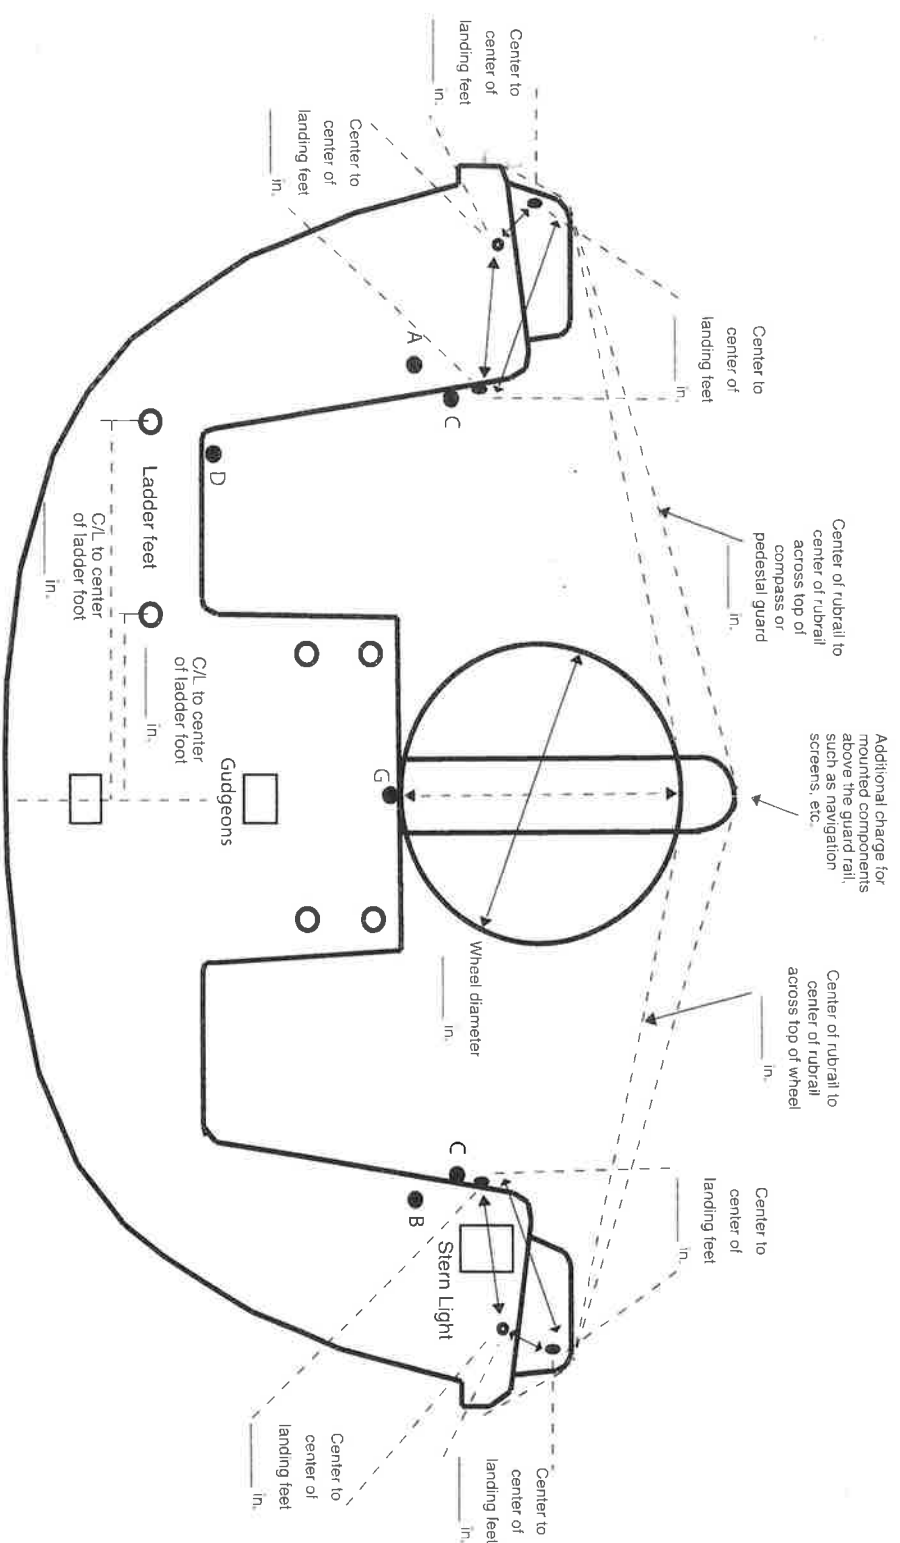

- A Single backstay attachment (Y/N) _____
- B Split backstay attachment (Y/N) _____
- C Split backstay attachments (Y/N) _____
- D Single backstay attachment (Y/N) _____

● = foot or pad
 mounted horizontally

Diagonal measurement: top of wheel to back edge of transom (G) _____ inches
 With mast stepped measure:

Aft surface of mast to top of compass (or pedestal guard if so equipped): _____ in.
 Aft surface of mast to top of steering wheel: _____ inches

Take a photo of the transom from centerline, astern,
 so photo is in the same perspective as the drawing.